


## DELETING FIELDS AND COVERAGE EZ-GUIDE 500

It is always good practice to delete or transfer fields off your EZ-Guide 500 display monthly or seasonally before it can create issues on your display like freezing up and boot loops.

The following are screenshots of an EZ Guide 500 and can also be used for an EZ Guide 250

1. Tap **I** to bring up the status window and view **STORAGE REMAINING**

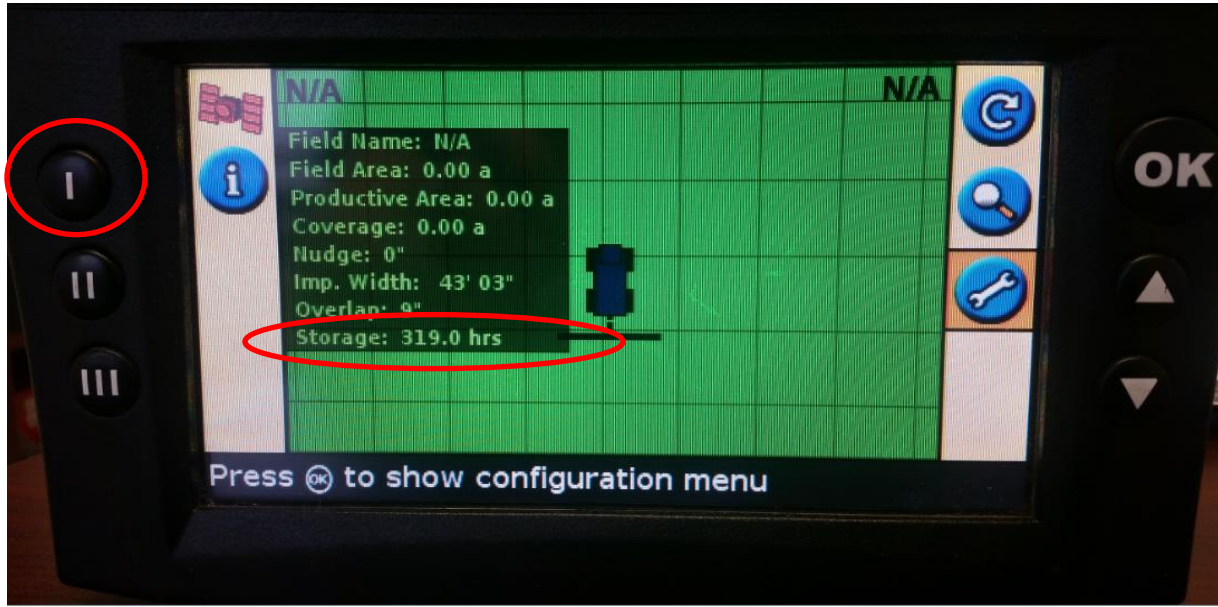


2. Use the **RIGHT BUTTONS** to scroll the highlighter down to the wrench or **SERVICE PAGE** and hit **OK**




## DELETING FIELDS AND COVERAGE EZ-GUIDE 500

3. Scroll down to **DATA MANAGEMENT** and hit **OK**

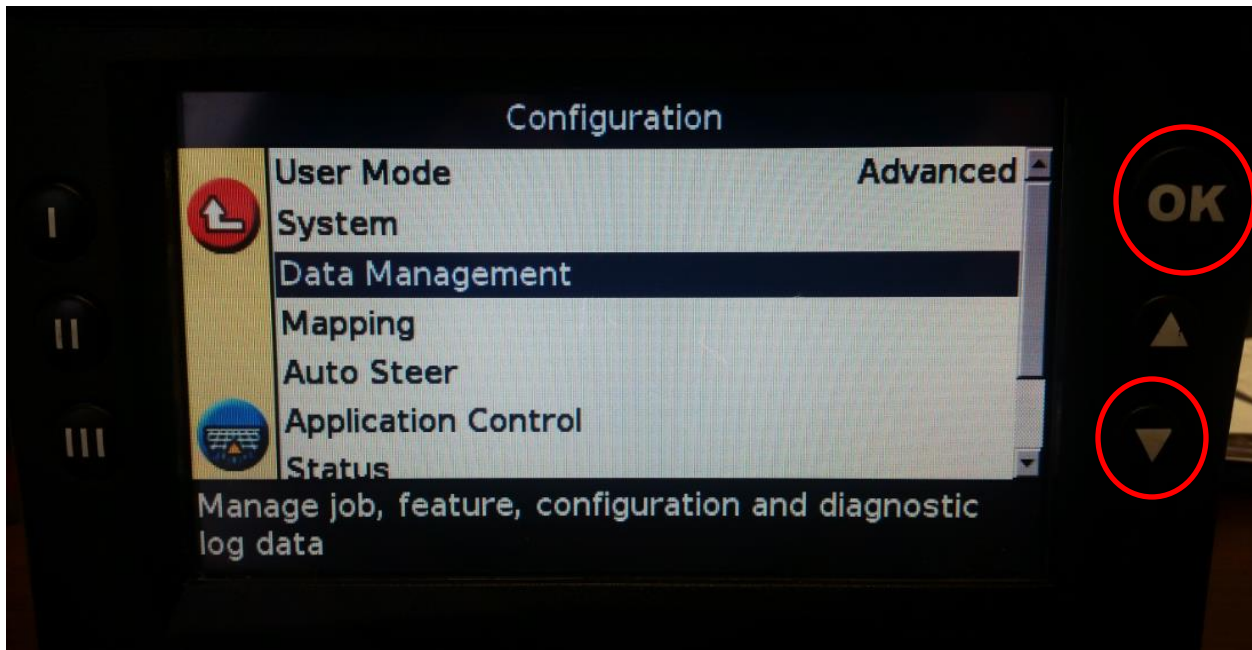

4. Highlight **MANAGE FIELDS** and hit **OK**

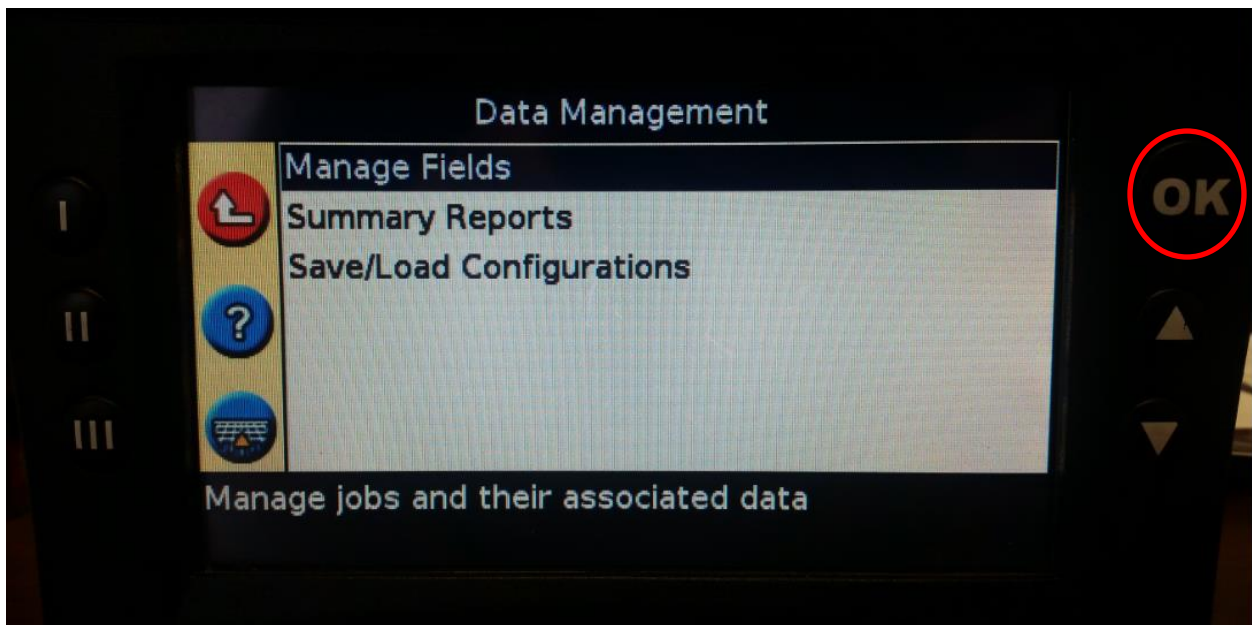


## DELETING FIELDS AND COVERAGE EZ-GUIDE 500


\***deleting fields** will erase all data pertaining to the field as well as the field name

\***deleting coverage logging** will only erase the coverage maps associated with the field name, the field name will remain in the display

5. In this scenario we will select **DELETE SELECTED FIELDS** and hit **OK**

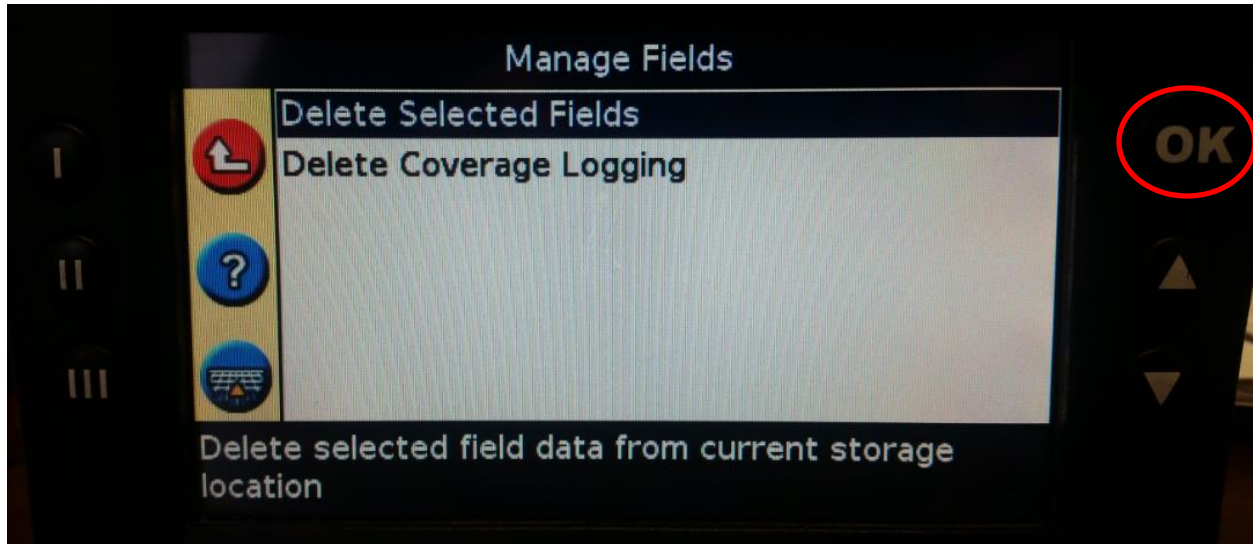

6. Select the fields you wish to delete

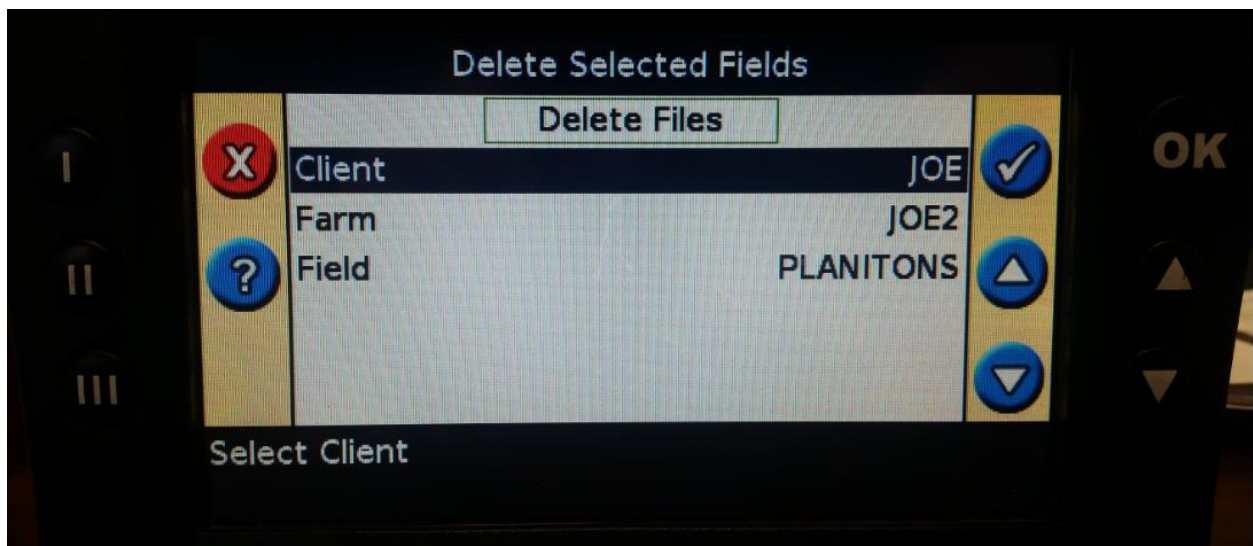


## DELETING FIELDS AND COVERAGE EZ-GUIDE 500

\***CLIENT** You may select **ALL** clients or only one client


\***FARM** You may select **ALL** Farms or only one farm

\***FIELD** You may select **ALL** Fields or only one field.

7. Typically we will choose **CLIENT** and select **ALL** and hit **OK**

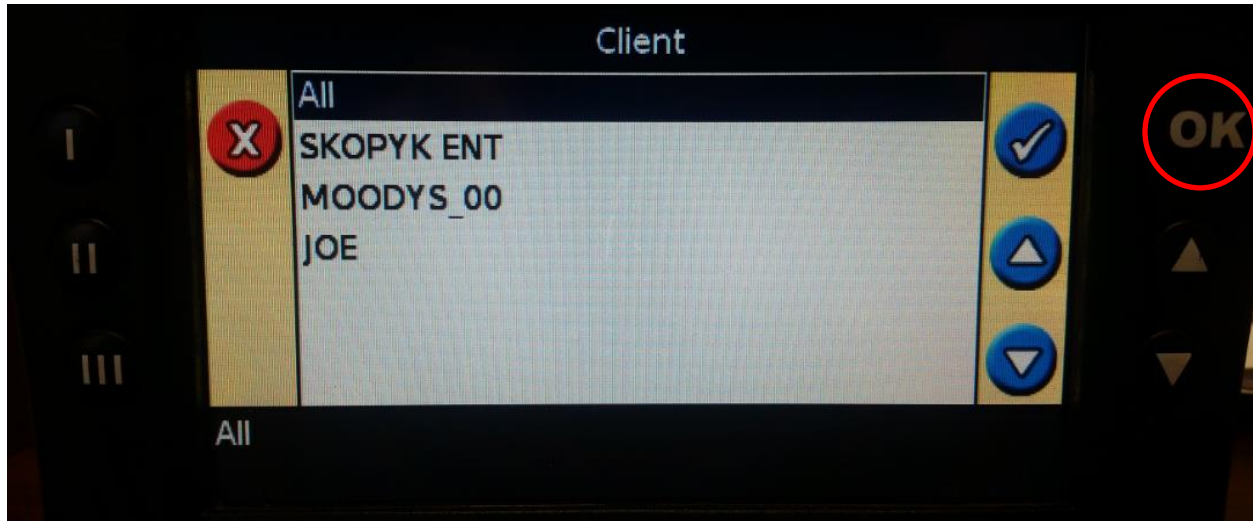


8. Highlight **DELETE FIELDS** and hit **OK**

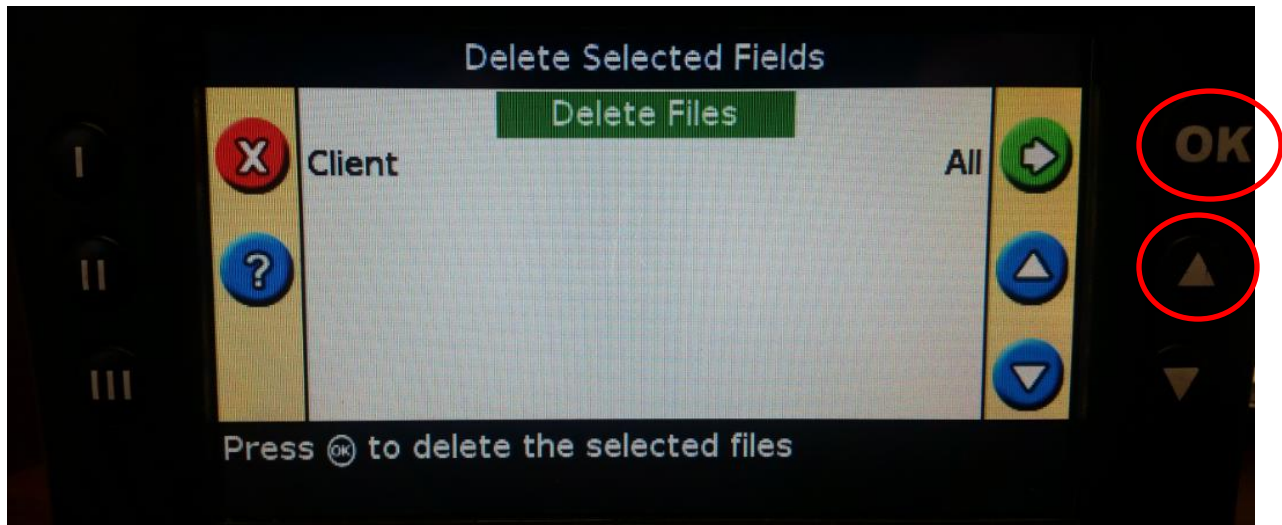


## DELETING FIELDS AND COVERAGE EZ-GUIDE 500

9. If you are sure you want to delete all Clients, farms and fields hit **OK**

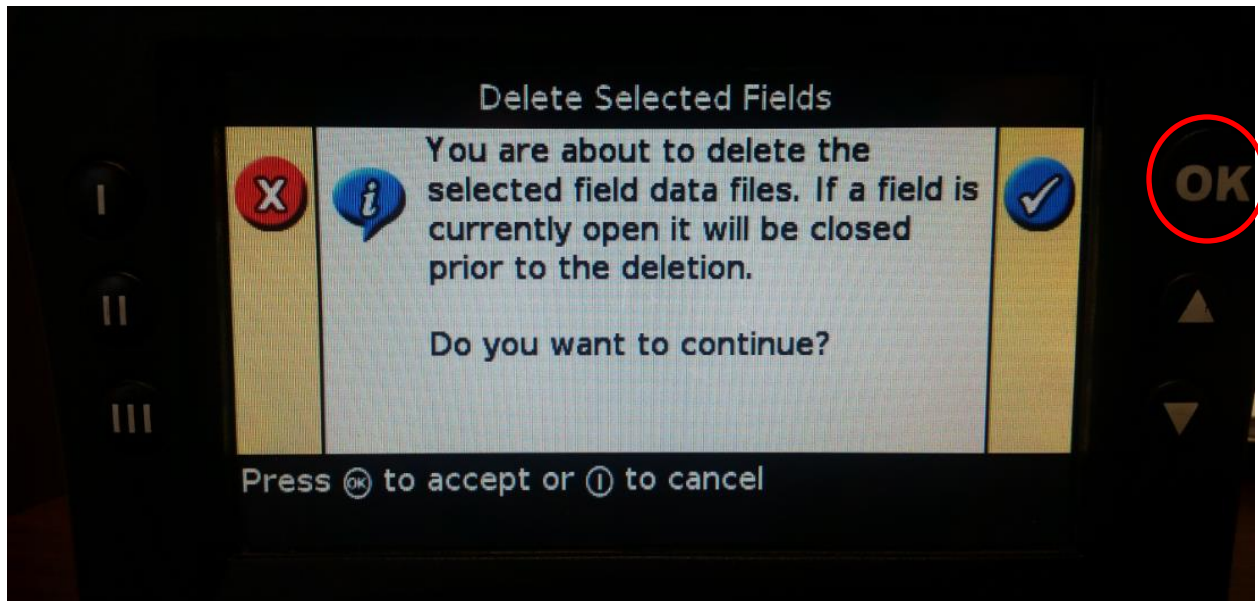


10. A status screen will show the deletion progress

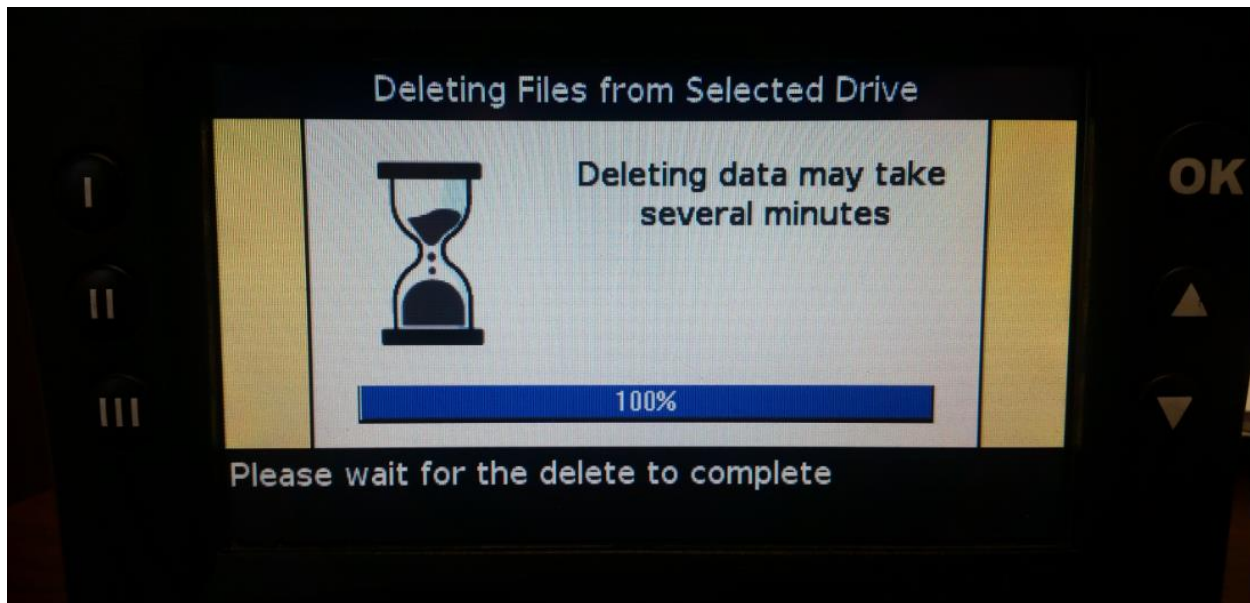


## DELETING FIELDS AND COVERAGE EZ-GUIDE 500

11. Once complete tap **OK**

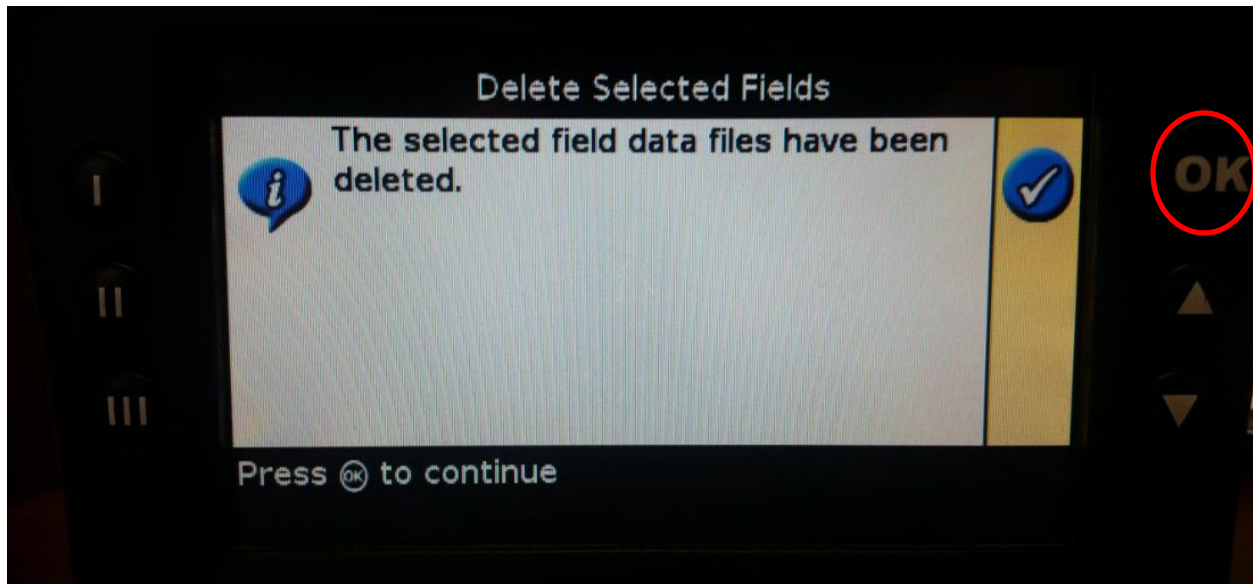


12. Select the **III** button

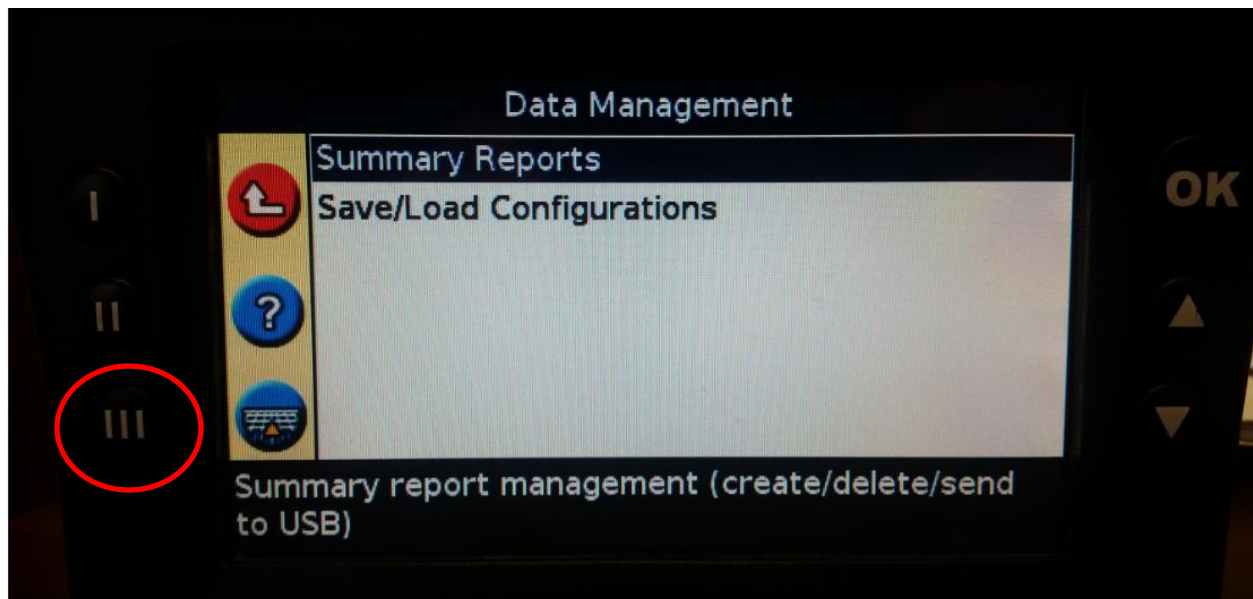

## DELETING FIELDS AND COVERAGE EZ-GUIDE 500

13. Once again hit the **I** button and view the **STORAGE REMAINING**

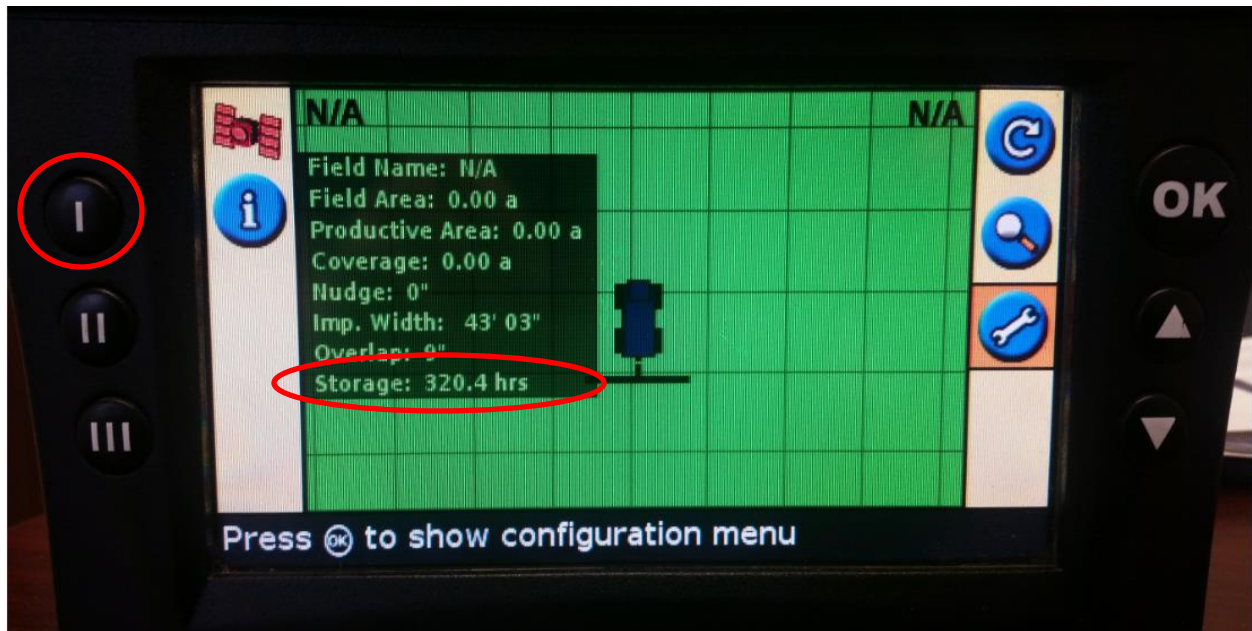

If you have completed all the steps properly you should have around 320 hours remaining in storage, congratulations!